WINDSOR
WINDOWS & DOORS
A Woodgrain Millwork Company

Next Dimension Sliding Patio Door with Blinds Between the Glass

Specifications

- 1" OA insulated glass in clear IG
- UV-coated 12.5 mm aluminum blinds
- Blinds available in white only
- Robust internal mechanisms assure operational durability
- Tested to 10,000 raise and lower cycles; equivalent of 20 years of actual use
- Efficient force-to-lift ratio for the lift and tilt mechanisms
- 10-year warranty on the insulated glass, operation of blinds and external control mechanism attached to the glass
- Blinds are handed for OX and XO door operation

Doors shown to the right are viewed from the interior looking out. Lift and tilt mechanisms will be located on the side jamb of the fixed lite and on the interlock stile of the operating panels. The mechanisms will be located on the right side jamb of the stationary units as shown in the figures to the right.

Features and Benefits

- Controls light and privacy
- Easy operation
- Lift and tilt features
- Reduced cleaning time; no need to dust
- Durable for long-lasting performance
- Safe for pets and children; no more cords

Sizes available in OX, XO and Stationary

- 2668S
- 3068S
- 5068
- 6068
- 26610S
- 30610S
- 50610
- 60610

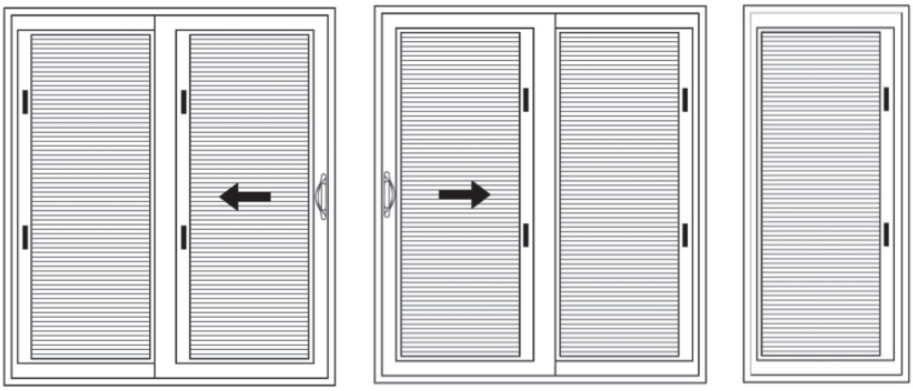

XO OX Stationary